


While not common, there are some installations that need a low flow, single cartridge arrangement but a high pressure rating. General Filtration's High Pressure Cartridge Housings can be ordered in single, double or triple cartridge length and are rated up to 3000 psig, covering nearly any possible high pressure application need you can think of.

Operating Data HPH	
Max Operating Temperature	350° F
Max Operating Pressure	3000 psig
Maximum Recommended Flow Rate	See below
Materials of Construction:	
Body	Carbon steel
Head	Carbon steel
Connections	
Inlet/Outlet	1" NPTF 3000#
Vent	¼" NPT 3000#
Drain	3/8" NPT 3000#
Cartridge suitability	2 ½" - 2 3/8" diameter x 10", 20" or 30" long (with correct housing)
Weight Empty	45 lbs - 10", 60 lbs - 20", 70 lbs - 30"

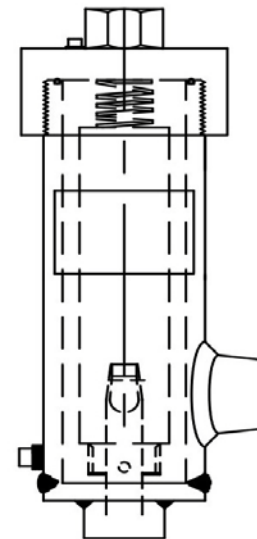

- Flow rating is based more on the cartridge to be used than the housing itself
- Side inlet/bottom outlet application with removable cover for ease of cartridge change out
- Designed to current ASME code and current CRN registered

ORDERING INFORMATION			
1Rx	1H-	C-	3000
# of cartridges required: 1Rx = 1 single cartridge	Cartridge length: 1H = 10" 2H = 20" 3H = 30"	Material of Construction: C = carbon steel	Maximum pressure: 3000 = 3000 psig

Example: 1Rx3H-C-3000 is a housing rated to 3000 psig to hold 1 @ 30" cartridge